


DEFENDER TA

FULLY-AUTOMATIC TURNTABLE STRETCH-WRAPPER

Features

- No operator required
- Up to 300% pre-stretch
- Film wipe-down to secure film tail
- EZ-Load film carriage
- Load-cell controlled film tension
- Provides one accumulation station for increased throughput
- Powered roller conveyor
- Touchscreen controlled

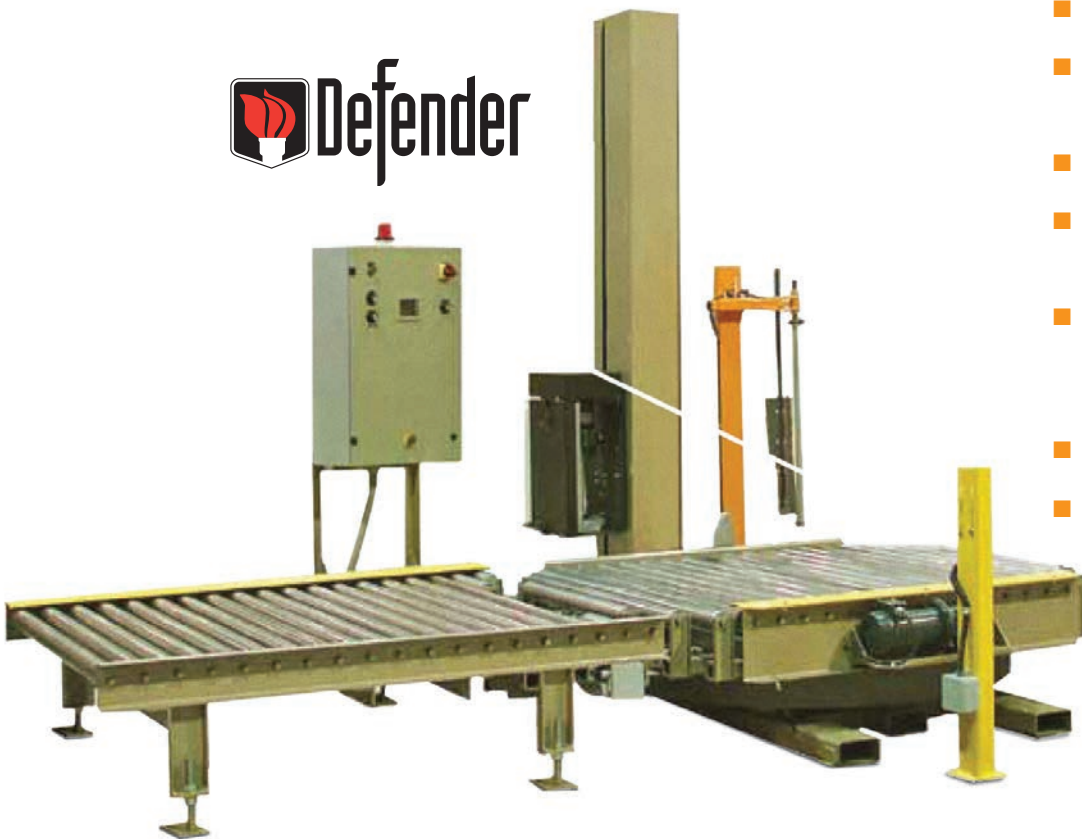

 **Defender**



DEFENDER TA

FULLY-AUTOMATIC TURNTABLE STRETCH-WRAPPER

Used where throughput levels require complete automation, and the ability to stage loads while simultaneously wrapping, the Defender TA allows accumulation of one pallet to reduce bottlenecks in material handling. The Defender TA will automatically wrap the product, cut the film and wipe the tail-end of the film securely to the load.

Designed for applications requiring less than 35 loads per hour, the Defender TA provides reliable automation at a price previously unavailable.

Standard Features

- Solid state PLC control
- Manual control functions
- 1/2 HP carriage lift motor
- EZ Load film carriage
- Load-cell actuated film tension control eliminates moving parts
- Film carriage contained within machine frame footprint for protection of operator
- ANSI #50 chain turntable and carriage lift device
- Up to 300% film pre-stretch
- Pneumatically actuated film tail wipe-down
- Articulating film clamp increases reliability and provides more attractive load
- Adjustable film tension
- Adjustable turntable speed up to 14 RPM
- Non-proprietary parts

Conveyors

- Driven conveyor on turntable and exit
- 3 1/2" diameter rollers on 4 1/2" centers
- 52" effective width
- 1/2" HP drive motor
- Chain-driven rollers
- Sealed bearings on rollers
- Additional gravity or driven conveyor available
- Rugged steel frame
- Standard 18" top of roller pass height

Available Options

- 30" film carriage
- Integrated weight scale
- Radio remote control
- Larger load sizes
- Additional conveyor sections
- Lanyard (pendant) control
- Cold temperature package

Specifications

Electrical Supply:	110/220V, 1 phase, 20 amp.
Load Size:	48" x 48" x 80" high
Load Weights:	Up to 4000 lbs
Production:	Up to 35 loads per hour (depending on configuration)

Features and specifications subject to change without notice

Represented By:

DEFENDER TA-02/16 116234

Samuel Strapping Systems
Packaging and Unitizing Solutions

U.S.A. - 1-800-323-4424 Canada - 1-800-607-8727

www.samuelstrapping.com
www.youtube.com/samuelstrapping